



HD1112

Impact Breaker



Quality Engineered
Excellence Since 1911

Parker Impact Crusher

The Parker - HD Impactor is designed for primary, secondary or tertiary crushing of highly abrasive materials, recycling materials and medium-low silica materials. Highly abrasive materials include sandstone, gravel, granite, basalt, glass, refractory rejects, cement clinker and others. Recycling materials include asphalt, concrete, building rubble, bricks and others. Medium-low silica materials include limestone, dolomite, bauxite, shales, gypsum, coal and others. Available on static, mobile or tracked chassis the Impactor offers easy transportation between locations and rapid on-site setup. The Parker Impact breaker is capable of producing material outputs greater than 250 tonnes/hour and is ideal for working in composite crushing arrangements with Parker primary crushing plants, screens and conveyors.

Extra Heavy Duty Rotor

Parker - HD Impact Crushers incorporate heavy, open disc style, four blow bar rotors as standard. Blow bar support beams are sized to ensure the Parker rotor has the highest moment of inertia available. This is important in absorbing the forces generated by the impacting process and is a key factor in our success with crushing large feed sizes. The rotor is supported by bearings mounted in massive solid housings manufactured from steel blocks with self-purging labyrinth seals.

Heavy Duty Blow Bars

The Parker - HD Impactor is equipped with 100 thick blow bars in 28% chrome iron offering the highest wear metal utilization factor available. The blow bar thickness can be increased to suit the larger feed sizes vital in recycling. The service life of the blow bars is extended through a design that permits the bars to be lifted via the top as wear occurs. Maintenance is safer and more expedient than in other designs.

Large Inlet Cross-section

This allows slabby material to enter the crusher without jamming. This is important when loading from a vibrating feeder etc.

Fully-hydraulic Impact Arms

Impact plates are cast blocks identical and interchangeable, thereby permitting optimum utilization. Gap settings between impact arm and rotor are adjusted hydraulically to allow the product size to be controlled. Hydraulic pressure on the impact arms is pre-set to resist the passage of uncrushed material through the impactor. If overloading, power failure, etc. causes material to exceed the pre-set pressure the impact arms retract in a controlled manner. Following completion of the retraction movement, the arm returns automatically to its pre-set gap position.

Wear Liners

Wear plates are generally cast from 28% chrome iron with a large proportion identical, thus interchangeable and turn-able.

Open Discharge

Large discharge opening allows for free discharge - no clogging - no capacity reduction.


High Serviceability & Access

The housing opens up hydraulically for maintenance and repair work. When the casing opens the blow bars are accessed in the vertical position. This enables the blow bars to be adjusted or replaced safer manner than in other designs.

Specification - Varies with Material & Crushing Modifications

| Machine | Capacity* (tph) | Max Feed Size* (mm) | Rotor Size Ø x Width | Weight (Kg) | Power (kW) |
|----------------|-----------------|---------------------|----------------------|-------------|------------|
| PARKER 1112 HD | > 250tph | 600 | 1120 x 1210 | 11200 | 200 |

(* Capacity is dependant upon feed size, material and product required.

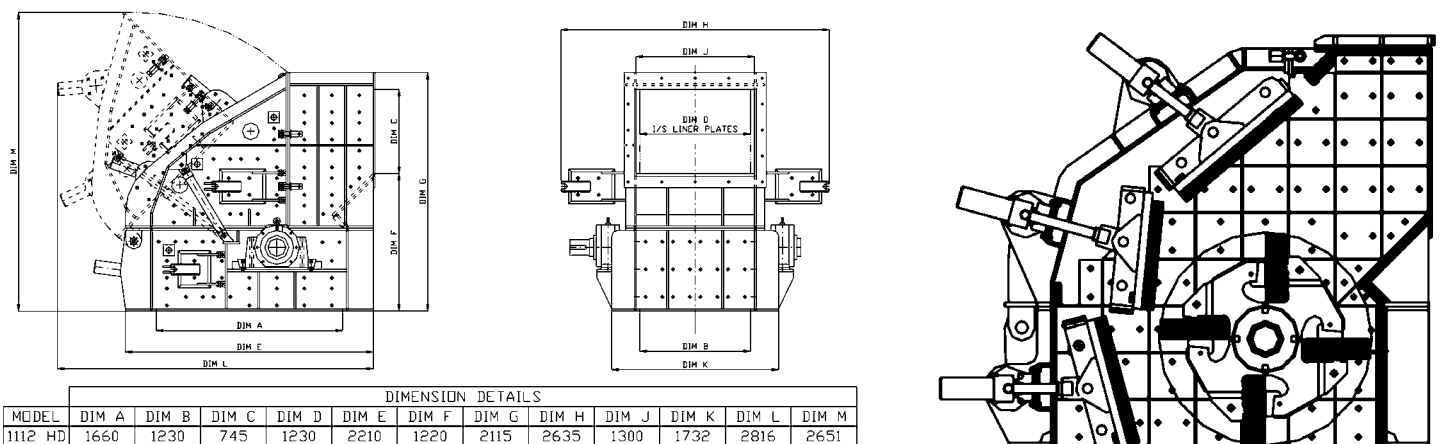

Parker Plant Limited, Viaduct Works, Canon Street, Leicester, LE4 6GH, United Kingdom

T: +44 (0) 116 266 5999 F: +44 (0) 116 261 0812 W: www.parkerplant.com E: sales@parkerplant.com

All reasonable steps have been taken to ensure the accuracy of this publication. However, due to our policy of continual product development, Parker Plant Limited reserve the right to change details without prior notice. All machines supplied in accordance with our standard conditions. Illustrations and photos may show optional equipment. All rights reserved.