




Tracked Jaw Crushers



Quality Engineered
Excellence Since 1911

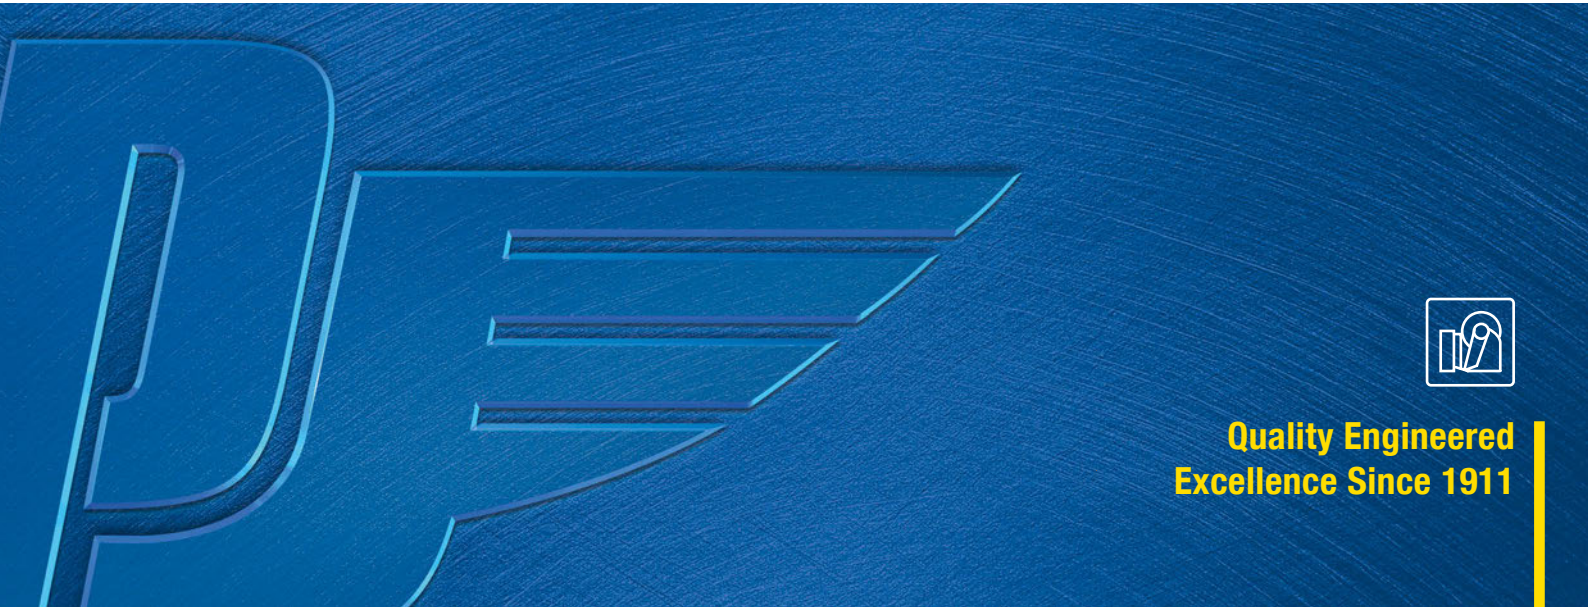

Parker tracked jaw crushers are available in a range of sizes and are fitted with world renowned RockSizer or RockSledger jaw crushers. The single toggle crushing action and design of jaw stock geometry perfected over many years gives impressive outputs when crushing even the hardest of materials. Where high capacities, reliability and excellent manoeuvrability are required, Parker tracked jaw crushers will perform.

Options

- Product Conveyor Weigh Scale
- Wear Resistant Steel Hopper Liners
- Feed Hopper Extension Wings
- Centralised Lubrication System
- Product Conveyor Dust Covers
- Higher & Wider Track Kit
- Hydraulic Water Pump
- Engine Bay Fire Suppression
- Hydraulic Breaker Arm (Bolted)
- Overband Magnet
- Side Discharge Conveyor
- Undercrusher Deflector Plate
- Increased Fuel Tank Capacity
- Remote Diesel Fill Pump
- Arctic (-20°C) or Desert (50°C) Pack
- Remote Located Service Centre



Tracked Jaw Range



TR0750



JR0960



JQ1165



JQ1180



JQ1310

Technical Specifications

	Units	TR0750	JR0960	JQ1165	JQ1180	JQ1310
	mm	12405	16274	14730	15040	17000
	ft / ins	40' 8"	41'	48' 4"	49' 4"	55' 9"
	mm	3840	4550	4340	4440	4940
	ft / ins	12' 6"	13' 9"	14' 3"	14' 7"	16' 2"
	mm	3425	4320	4250	5120	6350
	ft / ins	11' 2"	13' 9"	13' 11"	16' 10"	20' 10"
	mm	10700	15650	15050	15340	17300
	ft / ins	35' 1"	51' 5"	49' 4"	50' 4"	56' 9"
	mm	2500	2815	2800	3000	3500
	ft / ins	8' 2"	9' 3"	9' 2"	9' 10"	11' 6"
	mm	3000	3650	3600	3600	4650
	ft / ins	9' 10"	12'	11' 10"	11' 10"	15' 3"
	mm	3050	3500	3350	3520	3600
	inches	120"	138"	132"	139"	142"
	mm	1740	1870	2100	2100	2400
	inches	69"	73"	83"	83"	94"
	mm	800	1000	1200	1200	1500
	inches	31"	39"	47"	47"	59"
	mm	500	600	600	600	600
	inches	20"	24"	24"	24"	24"
	mm	700 x 500	900 x 600	1100 x 650	1100 x 800	1300 x 1050
	inches	28" x 20"	35" x 24"	43" x 26"	43" x 31"	51" x 41"
	kg	24,000	38,000	48,000	55,000	97,000
	lbs	52,900	83,775	105,600	121,000	213,400

Benefits

- Robust and durable crushers featuring rapid setup times
- High throughput capacity and large reduction rates
- Hydraulically adjustable crusher settings*
- Advanced electronic control system interface
- Easily accessible maintenance and service points
- Simple hydraulic circuits
- Efficient powerpack designed for low operating cost
- Global aftersales service, support and spare parts supply

* On larger models

DEALER STAMP

Parker Plant Limited, Viaduct Works, Canon Street, Leicester, LE4 6GH, United Kingdom

T: +44 (0) 116 266 5999 F: +44 (0) 116 261 0812 W: www.parkerplant.com E: sales@parkerplant.com

All reasonable steps have been taken to ensure the accuracy of this publication. However, due to our policy of continual product development, Parker Plant Limited reserve the right to change details without prior notice. All machines supplied in accordance with our standard conditions. Illustrations and photos may show optional equipment. All rights reserved.